

Chapter D

Newton's Laws and Applications

Blinn College - Physics 2325 - Terry Honan

D.1 - Historical Context

Aristotle 384-322 BC

Rest is the natural state. The problem of physics was to explain why a body had a velocity.

It is a matter of common experience that after giving a body a push, it will eventually slow to a stop. When a body is pushed it is given an impetus; it continues to move until it loses that impetus. This notion is now known as incorrect.

Aristotle was a philosopher and physics was, for him, just natural philosophy. This perspective led to a de-emphasis of experiment. Physics was a subject one thinks about and writes about, but there was no need to test ideas with experiment. The history of science is filled with mistakes; what made Aristotle's mistakes so serious was that by de-emphasizing experiment no one found his errors for almost 2000 years.

As an example of the absurdity of Aristotelian physics, Aristotle claimed that heavier bodies fall faster than lighter ones. This seems intuitive at first; a brick falls faster than a feather. But he took it a step further by saying that the rate is *in proportion* to a body's mass. This was a precise mathematical statement and verifying it was as simple as dropping two objects of different mass. It is remarkable that for almost 2000 years no one thought of performing that experiment to test Aristotle's hypothesis.

Galileo Galilei 1564-1642

Galileo was the one who finally performed the free-fall experiment mentioned above. He observed that bodies of different mass fall with the same acceleration. In fact, most of the earlier material on kinematics of free fall and projectiles is due to Galileo realized that a feather fell slower than a hammer because of some extra force that we now know as friction.

Motion with constant velocity is the natural state. The problem of physics was to explain what caused changes in velocity, or what caused acceleration.

The reason why a body, when given a push on a horizontal surface, slows to a stop is due to friction. One can create motion with less friction and can imagine motion without any friction. In that case the body will continue to move indefinitely. Naturally bodies move with constant velocity unless some net force causes it to have an acceleration.

Galileo was a transitional figure. He demonstrated the inadequacy of Aristotelian physics. He also asked the right questions. The problem of understanding motion was no longer to explain why a body moves but to explain what caused changes in the motion.

Isaac Newton 1642-1727

Newton grew up in a Galilean world; the fallacies and misconceptions of Aristotelian physics were no longer a part of one's education. Galileo had properly posed the problem: What causes acceleration. Newton was the remarkable genius capable of providing the answer. He summarized dynamics in terms of three laws.

It would be hard to overstate the historical significance of Newton. In addition to fundamentally altering later intellectual developments, he had a profound influence on the practical aspects of common life; the technological explosion leading to the Industrial Revolution is directly related to his clear exposition of the science of mechanics.

D.2 - Newton's First Law

Newton with his first law summarized what Galileo had done. The idea is that motion with a constant velocity is the natural state.

An object at rest tends to stay at rest. An object in uniform linear motion tends to maintain that motion. The

word "tends" should be taken to mean: unless acted upon a net force.

The first sentence sounds more Aristotelian than Galilean. Uniform linear motion implies motion in a straight line at a constant speed, that is: constant velocity. Rest should only be viewed as a special case of constant velocity; it is a constant *zero* velocity.

A force is anything that pushes or pulls on an object. We will see that forces are vectors.

False Forces

Recall that a frame of reference is some coordinate system used to study motion. In an accelerated frame, for example inside an accelerating car, one feels one's self pushed opposite the direction of acceleration. When moving in a car in a straight line and braking, the acceleration is backward and one feels a false force pushing forward. When turning to the left, the acceleration is to the left and the false force is to the right. Generally, in any accelerated frame there is a false force opposite the acceleration.

What is the nature of these false forces? The point of the first law is that all bodies will tend to move with a constant velocity. When braking in a car, a person in the car will tend to keep moving at a constant velocity but the car slows around him. Relative to the car he is thrown forward. Similarly, when turning to the left in a car the person tends to continue in a straight line and the car moves to the left.

The Principle of Relativity

The principle of relativity is built in to Newtonian mechanics. It is a result of Galileo's observations on motion. This notion of relativity is known as *Galilean Relativity* and should be contrasted with *Special Relativity* which was introduced by Albert Einstein in 1905.

All inertial frames of reference are equivalent.

Recall that a frame of reference is some coordinate system used to study motion. If someone (preferably a passenger) throws a ball straight upward in a car moving with a constant velocity, it will move in a way that is indistinguishable from free fall. To an observer on the side of the road the ball would move as a projectile but to both observers the acceleration would be the same, a downward acceleration of g . If the car is turning, or accelerating in any way, then there will be false forces and the motion will deviate from free fall.

An inertial frame is a rest frame or a non-rotating frame moving at a constant velocity with respect to a rest frame.

Basically, an inertial frame is a non-accelerated frame. The equivalence of inertial frames means that there is no preferred absolute rest frame. Moving with a constant velocity is indistinguishable from being at rest. Suppose some experiment is performed in a van moving at a constant velocity. (We assume the road is as smooth as possible.) The result of that experiment will be give the same result as if the van were at rest.

Space and time are absolute in Galilean relativity.

Absolute space means that space is three dimensional Euclidean space. The length of a meter stick is the same to all observers and is independent of relative motion. If x , y and z are coordinated relative to one frame and x' , y' and z' are coordinates relative to a different frame the lengths (actually length-squared) being equal can be written as

$$\Delta x^2 + \Delta y^2 + \Delta z^2 = \Delta x'^2 + \Delta y'^2 + \Delta z'^2 \quad (\text{Absolute Space})$$

Absolute time implies that the time between two events (two different positions and two different times) is the same for all observers. If Δt is the time between two events in one frame and $\Delta t'$ is the time relative to another frame, then

$$\Delta t = \Delta t' \quad (\text{Absolute Time})$$

Einstein's Special Relativity eliminated the notions of absolute space and time.

Although relativity had been a well-established principle of classical mechanics, it became clear in the middle of the nineteenth century that the laws of electromagnetism, which were summarized by Maxwell's four equations, violated this principle. It appeared that Maxwell's equations were valid in only one absolute rest frame. In 1905 Einstein realized that Maxwell's equations were valid in all inertial frames and he put relativity back into fundamental physics. To do this however he had to modify the notions of absolute space and time that were implicit in Galilean relativity.

In special relativity, lengths and times are different frames but, it turns out, that the length-squared minus the time-squared is the same in all frames, where we multiply time by the speed of light c to make the units work out.

$$\Delta x^2 + \Delta y^2 + \Delta z^2 - c^2 \Delta t^2 = \Delta x'^2 + \Delta y'^2 + \Delta z'^2 - c^2 \Delta t'^2$$

D.3 - Newton's Second Law

One can state the second law with words, as in the case of the first law, but it just becomes a complicated sentence dictating a simple equation. It will then be given as an expression.

$$\vec{F}_{\text{net}} = m \vec{a} \quad (\text{D.1})$$

The net force \vec{F}_{net} is the vector sum of all forces acting on a body. m is the mass of the body and \vec{a} is its acceleration. Newton's first law may be viewed as a consequence of the second. If $\vec{F}_{\text{net}} = \vec{0}$ then $\vec{a} = \vec{0}$ and this implies \vec{v} is a constant.

Definition of Mass and Force

Force is a measure of the amount that something pushes or pulls. Mass is a measure of the amount of material. The second law may be considered a simultaneous definition of force and mass. To define a mass all we need is a notion of a reproducible force. For example consider a spring that is compressed by a fixed amount to a standard distance; if that spring is then compressed to that same standard distance will produce the same force and this is reproducible. If we call this force F_0 then we can act this same force on different masses m_0 and m , and measure their instantaneous accelerations. If m_0 gets an acceleration a_0 and m gets acceleration a . We can then write the ratio of the masses in terms of the ratio of the accelerations.

$$F_0 = m_0 a_0 = m a \implies \frac{m}{m_0} = \frac{a_0}{a}$$

To verify that this can be used as a definition of mass imagine grabbing some rock and choosing that as the standard of mass; call it 1 Rock. If the mass used is this standard rock, then $m_0 = 1$ Rock; if the second mass gets an acceleration that is $1/2$ that of the rock then we conclude that its mass is $m = 2$ Rocks.

To show how the second law is a definition of force we act different forces on the same mass, m_0 .

$$F_0 = m_0 a_0 \text{ and } F = m_0 a \implies \frac{F}{F_0} = \frac{a}{a_0}$$

Units: The SI unit for Force is: N = newton = kg m/s²

D.4 - Newton's Third Law

Newton's third law is crucial for a proper understanding of force. If \vec{F}_{12} is the force of body 1 on body 2 and \vec{F}_{21} is the force of 2 on 1, then

$$\vec{F}_{21} = -\vec{F}_{12} \quad (\text{D.2})$$

This is often stated in the language of action-reaction pairs: to every action there is an equal and opposite reaction. Equal and opposite means that one vector is the negative of the other.

At first glance the third law is counter-intuitive. When a small car gets in a collision with a large truck the force of the truck on the car is the same, in magnitude, as that of the car on the truck. The same force on a smaller mass has a larger effect, meaning that since $F = m a$ the acceleration is larger. For an extreme example, the gravitational force of the Earth on a person is equal in magnitude to the force of the person on the Earth. Since the mass of the Earth is *much* larger the acceleration of the Earth is negligible.

Tension, Normal Forces and Surface Friction

Suppose ten people pull on a rope in a tug-of-war. Each person can pull with a force of F_0 . Suppose five pull on one side and five pull on the other. The total force pulling in either direction is $5 F_0$, which is then the tension in the rope. Suppose instead all ten pull on the same side against a tree. The force pulling, and thus the tension, is now $10 F_0$. In this second case the rope pulls on the tree with the $T = 10 F_0$ and by the third law the tree pulls back with the same force; the tree then is equivalent to another ten people pulling on the other side. At any position P in a rope, the left part of the rope pulls to the left with a force T and the right part pulls to the right with a force of T . A spring scale that stretches, like a fish scale, reads this tension force in a rope.

Forces between surfaces break up into two components: perpendicular to a surface is the normal force and parallel to a surface are friction forces. The word normal means perpendicular. When a person stands on a floor he pushes *down* on the floor with a normal force N equal to his weight. The floor then pushes *up* on the person with the same magnitude force. Suppose instead that a person leans against a wall. The person pushes into the wall with normal force of N and the wall pushes back on the person with the same magnitude normal force. Friction forces also break up into equal and opposite pairs. When an object slides to a rest on a floor, the floor pushes backward on the object with a force known as *kinetic friction*; the object then exerts a forward friction force on the floor. When a walking person pushes backward on the floor with a *static friction* force, the floor pushes forward with the same force.

D.5 - Applying the Second Law

Free-body Diagrams

The left hand side of the second law, F_{net} , is the vector sum of all forces acting on a body. To help with this we draw a free-body diagram; this is a vector diagram showing all forces acting on the body. To draw a free-body diagram we must include contact forces and action-at-a-distance forces.

Include all contact forces.

Contact forces are due to all things in contact with the body. Imagine a surface around the body; the contact forces are due to everything piercing that surface. If something is standing on a floor or leaning against a wall then we draw the corresponding normal forces and perhaps friction forces. Air is in contact with a body and its effects, if they need to be considered, will be contact forces.

Include field forces

The forces that can act on a body without touching it are the *field forces*. These are the fundamental forces of nature: gravity, electromagnetism, the weak nuclear force and the strong nuclear force. The two nuclear forces act only over short distances and, for purposes of classical mechanics, can be neglected. It should be pointed out that the electromagnetic and weak nuclear forces are no longer considered separate forces; in 1968 the Electroweak unification was published and it was experimentally verified in the early eighties.


In Newton's time these forces were considered action-at-a-distance, that is distant objects directly interacting. This Newtonian notion implies an instantaneous interaction over arbitrarily large distances. We now understand interaction in terms of the notion of a field. The idea is this: Particles create fields, fields propagate at a finite speed by dynamical rules and then fields exert forces on other particles.

Accelerations do not belong in free-body diagrams.

The free-body diagram gives the left-hand side of the second law. The right-hand side involves the acceleration. It is important that to note that $m\vec{a}$ is not a force and does not belong in the free-body diagram. It is a good idea to draw the acceleration next to the diagram, though. Being systematic with directions, as we were in earlier chapters, is more trouble than it is worth. The easiest method is to choose the direction of the acceleration as positive.

One Dimensional Examples

A Standing Person / A Hanging Weight

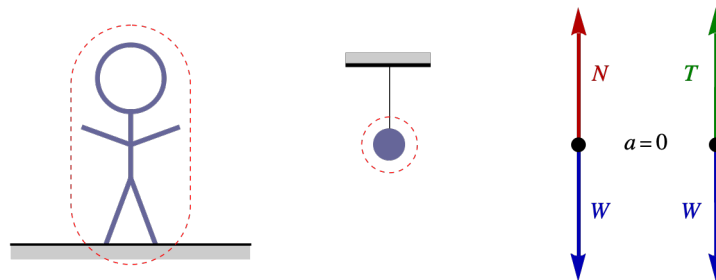

It follows from the second law that the normal force equals the gravitation force on the person, his weight.

$$F_{\text{net}} = m a \implies N - W = 0 \implies N = W.$$


A bathroom-type spring scale, which is compressed, reads the normal force. This, in this stationary case, is just the weight.

For the hanging mass it is the same but there is a tension force pulling up instead of the normal force pushing up.

$$F_{\text{net}} = m a \implies T - W = 0 \implies T = W.$$

Tension is read by the other type of spring scale, one that you stretch. Think of a fish scale or a hanging produce scale in a grocery.

Free Fall and Weight

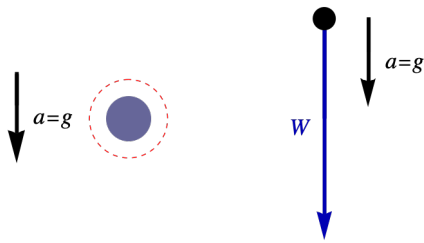


When an object is in free-fall, the only force acting on a body is its weight. As we established in Chapter B it has a downward acceleration of g . Choosing downward as positive the second law implies that the weight equals the mass times the acceleration due to gravity.

$$F_{\text{net}} = m a \implies W = m g$$

This expression applies generally to give the weight of a body of mass m in a gravitational field. The strength of that field is g , the acceleration due to gravity. Do not think of g as an acceleration but as the proportionality between weight (a force) and mass, which is dimensionally an acceleration. If gravity is the only force acting on a body, as is the case of free-fall, then the downward acceleration is g .

Elevators and Apparent Weight

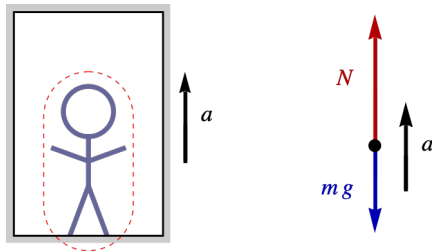


$$F_{\text{net}} = m a \implies N - m g = m a \implies N = m g + m a$$

The normal force here, which can still be read by a spring scale, is called the apparent weight. Similarly, a mass being lifted by a rope and upward acceleration will experience the same apparent weight, but the expression would be for the tension instead of the normal force.

Note that for an object in free-fall $a = -g$, so its apparent weight is zero. This is called weightlessness. An orbit is a perpetual state of free-fall. There is no apparent weight in orbit. Weightlessness does not mean there is no gravity; in a low-earth orbit an astronaut's weight is just a little less than his earth weight. The point is that the astronaut feels no gravity; the apparent weight is zero.


Spring Scales and Balance Scales

Spring scales measure weight. On the moon, the acceleration due to gravity is about one-sixth that on the earth. A spring scale on the moon would give one-sixth the earth weight. There are two types of spring scales.



A tension spring scale measures the tension in a rope or string.


A tension spring scale stretches under tension and the amount the spring stretches depends on the tension; it can be used to measure tension. Hanging something from one measures its weight. Think of a fish scale.

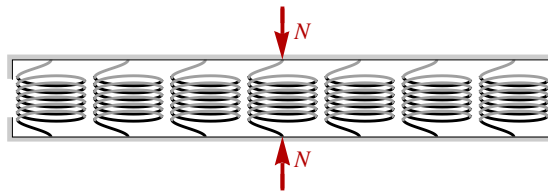

A compression spring scale measures a normal force.

A bathroom-type scale is a spring scale that compresses. The amount it compresses varies with the normal force and thus, it measures the normal force between surfaces. Standing on one gives a person's weight.

A balance scale is fundamentally different; it measures mass. The simplest balance scale has two well-balanced trays pivoting symmetrically on a fulcrum. An unknown mass is placed on one side and known masses are added to the other side until there is balance.

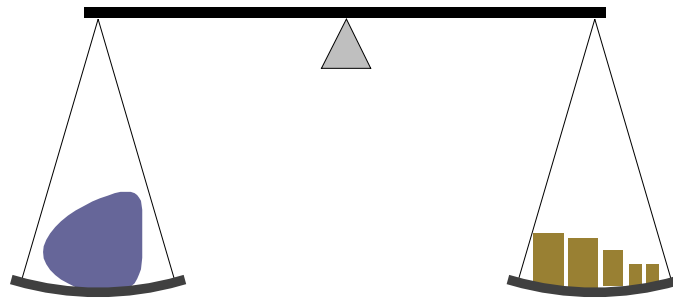

A balance scale measures mass.


It should be clear that the setup above would give the same result on the moon as on the earth; it measures mass not weight. Although the simple balance shown above is conceptually clearest, there are many other common types. For example, a triple-beam balance is common in physics labs; an unknown mass is placed on a tray and masses are moved along bars until there is a balance. Also a doctor's office-type scale uses the same principle and also measures mass.

Two Dimensional Examples

When given a two dimensional problem we first draw a free-body diagram. Next, we resolve all forces and the acceleration into a coordinate system representing a pair of perpendicular directions. Applying the second law to both perpendicular directions gives a pair of equations.

Block on a Frictionless Inclined Plane

Consider the case of a block sliding down a frictionless inclined plane. We will, as is the convention, always refer to the angle of an incline as the angle of the surface measured from horizontal. First we draw the free-body diagram. The only thing touching the block is the surface of the incline. Recall that surface forces break up into two components: perpendicular to the surface is the normal force N . The friction forces are parallel to the surface; since there is no friction we have the normal force as the only contact force. Then we add in the weight mg which acts, of course, downward. Note that the angle between the surface's normal and vertical is the same as between the surface and horizontal.

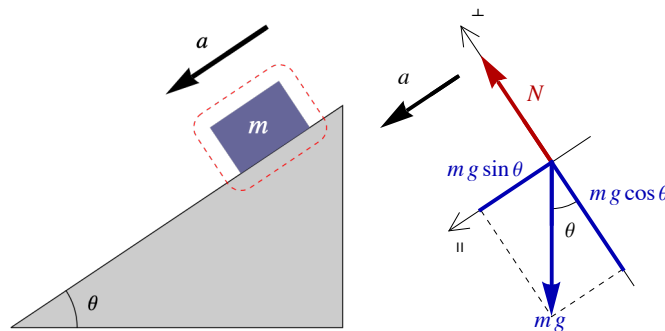

Since surface forces split naturally into parallel and perpendicular components, it is typically best to choose the coordinates to be parallel and perpendicular to the surface. The normal force is already resolved along the perpendicular direction. Whenever there is an inclined plane at angle θ resolving the weight into parallel and perpendicular components always gives:

$$|W_{\perp}| = mg \cos \theta \text{ and } |W_{\parallel}| = mg \sin \theta.$$

The acceleration only has a parallel component and that is just a . Applying the second law to the parallel direction we get


$$F_{\text{net}, \parallel} = ma_{\parallel} \implies mg \sin \theta = ma \implies a = g \sin \theta.$$

Solving the second law in the direction perpendicular to a surface *always* gives the normal force.

$$F_{\text{net}, \perp} = ma_{\perp} \implies N - mg \cos \theta = 0 \implies N = mg \cos \theta.$$

If we are just solving for the acceleration this value isn't needed; we will see that in examples involving friction that the normal force will be of interest.


Example D.1 - The Accelerating Pendulum as an Accelerometer

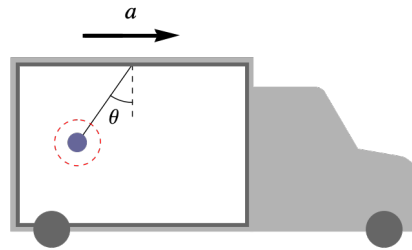

Anything hanging in a vehicle can be used as an accelerometer, meaning it that can measure acceleration. Relate the hanging angle, as measured from vertical as shown, to the acceleration.

Solution

Here we will choose our perpendicular axes to be horizontal (in the direction of the acceleration) and vertical. Note that the forces do not balance here; they should not balance because there is an acceleration.



After resolving the tension into horizontal and vertical components, we apply the second law to each direction and get:

$$F_{\text{net,hor}} = m a_{\text{hor}} \implies T \sin \theta = m a$$

$$F_{\text{net,ver}} = m a_{\text{ver}} \implies T \cos \theta - m g = 0 \implies T \cos \theta = m g.$$

From these two expressions we can relate the acceleration to the angle. Divide the second expression into the first and using $\tan \theta = \sin \theta / \cos \theta$ we get:

$$a = g \tan \theta$$


Problems with More than One Mass

Newton's second law applies to every mass in the universe. When considering a mechanics problem with multiple masses we follow the procedure outlined above for each mass; there is a separate free-body diagram for each mass.

Atwood's Machine

An ideal pulley is frictionless and light. The approximation of a pulley being frictionless is often appropriate. For a pulley to be light its mass must be small compared to the other masses in the problem. With an ideal pulley the tension is the same on both sides of the pulley.

Atwood's machine is a standard example. It consists of two masses m_1 and m_2 connected by a string over an ideal pulley. Here we take $m_1 < m_2$. It is clear that m_1 will accelerate upward and m_2 will accelerate downward. We make the assumption that the string is ideal; this means that it has negligible mass and does not stretch. In this case, the ideal string assumption implies that whatever distance m_1 moves upward, m_2 moves downward. Since the acceleration is the second derivative of the position we can then conclude that two accelerations are equal in magnitude.

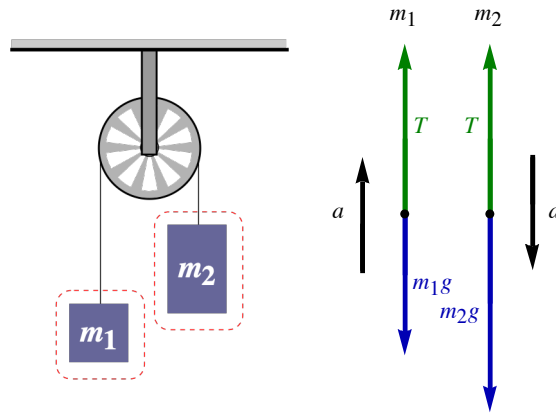

We now apply the second law to each mass. It is usually easiest to choose the direction of the acceleration to be the positive direction. Doing that here we will choose up to be positive for m_1 and down for m_2 . Using this convention we get:


$$F_{\text{net},1} = m_1 a_1 \Rightarrow T - m_1 g = m_1 a$$

$$F_{\text{net},2} = m_2 a_2 \Rightarrow m_2 g - T = m_2 a$$

In these two expressions the tension and acceleration are the unknowns. The easiest method for solving for the acceleration is to add the two expressions, eliminating the tension. This gives:

$$a = \frac{m_2 - m_1}{m_1 + m_2} g.$$

A System of Pulleys

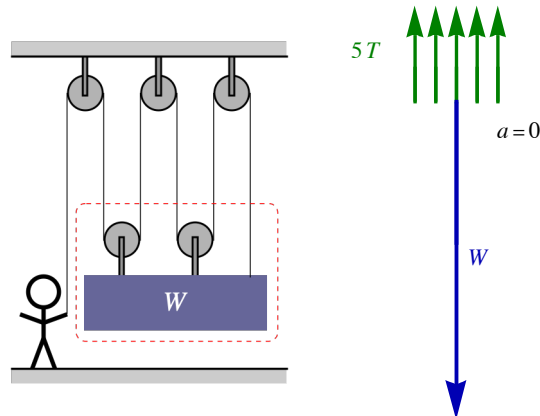


To find the net force lifting on the weight look at all the ropes pulling upward on the object. As a rule when pulleys are attached to a mass always consider the pulleys as part of the mass as shown. There are five ropes leaving the object. Assuming all pulleys are ideal, we get that there is a total force of five T pulling upward.

$$F_{\text{net}} = m a \Rightarrow 5 T - W = 0 \Rightarrow T = \frac{W}{5}$$

This is an example of a mechanical advantage. With this pulley arrangement a heavy weight can be lifted with a force that is $1/5$ the weight of the object. One is not getting something for nothing here. The assumption that the rope doesn't stretch implies that lifting the weight a certain distance involves pulling five times the distance on the rope. This is generally the case with a mechanical advantage and is the basis of simple machines. One can apply a smaller force but it must act over a larger distance.

Example D.2 - A Complex Arrangement


Consider the arrangement shown below. Assuming the incline is frictionless and the pulleys are ideal, what is the acceleration of m_1 down the incline?

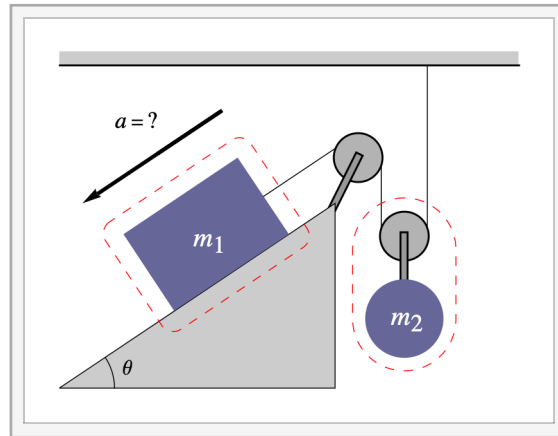

Interactive Figure

Solution

The assumption that the string does not stretch allows us to relate the accelerations. Whatever distance m_1 slides down the incline, m_2 moves upward by half that amount. To see this notice that when m_2 moves upward that length comes out of the string twice. (See the Interactive Figure above.) It follows that the acceleration of m_2 is half that of m_1 . Since the problem asks for the acceleration of m_1 we will call that a and this then gives $a/2$ for the acceleration of m_2 .

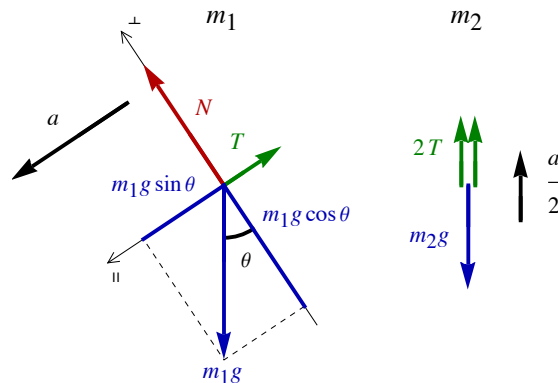

Since there is no friction and we don't need the normal force we can avoid the resolution of forces on m_1 perpendicular to the surface. The second law applied to the parallel direction gives:

$$F_{\text{net},1,\parallel} = m a_{1,\parallel} \implies m_1 g \sin \theta - T = m_1 a.$$

Applying the second law to m_2 gives:

$$F_{\text{net},2} = m a_2 \implies 2T - m_2 g = m_2 a/2.$$

The simplest way to find a is to eliminating T by adding the first equation to half the second.

$$a = \frac{m_1 \sin \theta - m_2/2}{m_1 + m_2/4} g$$


D.6 - Forces of Constraint

Often in mechanics problems the motion of objects is constrained. A force of constraint is responsible for keeping the constraint; it will take on whatever value is needed to maintain its constraint. Often forces of constraint satisfy inequalities. These vague general comments will become clearer as examples are given. The examples we will discuss here are tension forces, normal forces and static friction forces.

Tension Forces as Constraints

Tension is a force of constraint. The constraint associated with tension is the condition that the length of the rope stays constant. In our examples with ropes and two masses, this condition is what related the accelerations of the masses. In Atwood's machine the string not stretching meant that the two masses moved the same distance, implying the accelerations were the same magnitude. In the example with two pulleys

the mass that moved twice the distance of the other had twice the acceleration. These conditions eventually lead to a value for the tension forces.

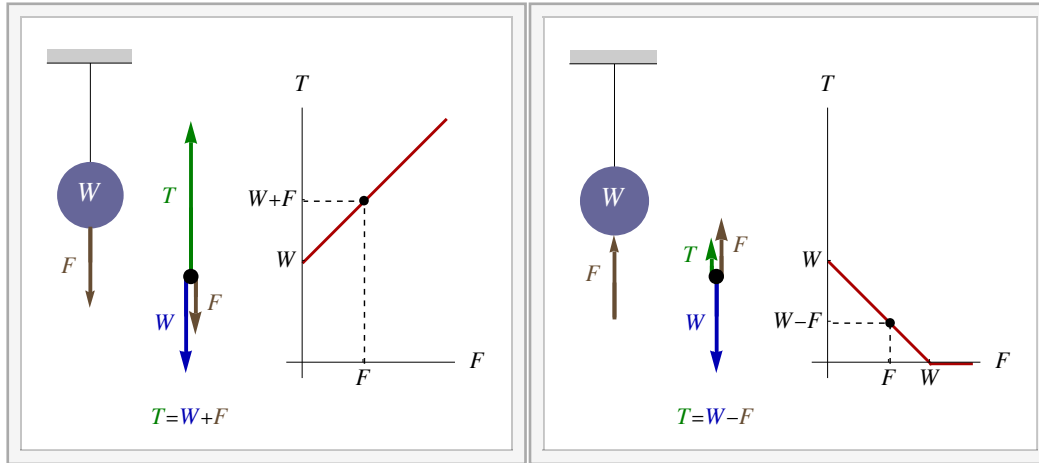

Interactive Figure


The interactive figures above illustrate tension as a force of constraint. Both show a weight W hanging from a string or rope. On the left an applied force F pulls downward on the rope. The larger F gets the larger $T = W + F$ gets; the tension T will take on whatever value is needed to maintain the constraint. The figure on the right shows the same hanging weight but now the applied force acts upward. As the applied force F gets larger $T = W - F$ decreases. It is clear that if F is larger than the weight W , then the string will lose its tension and the mass will accelerate upward. To maintain the constraint the tension would need to be negative, but it cannot. The tension force satisfies a simple inequality

$$T \geq 0. \tag{D.3}$$

This is equivalent to saying: "You can't push with a rope." Note that negative tensions are possible for rigid objects, like a stick.

Normal Forces as Constraints

The normal force is also a force of constraint. The constraint is that there is no motion through the surface.

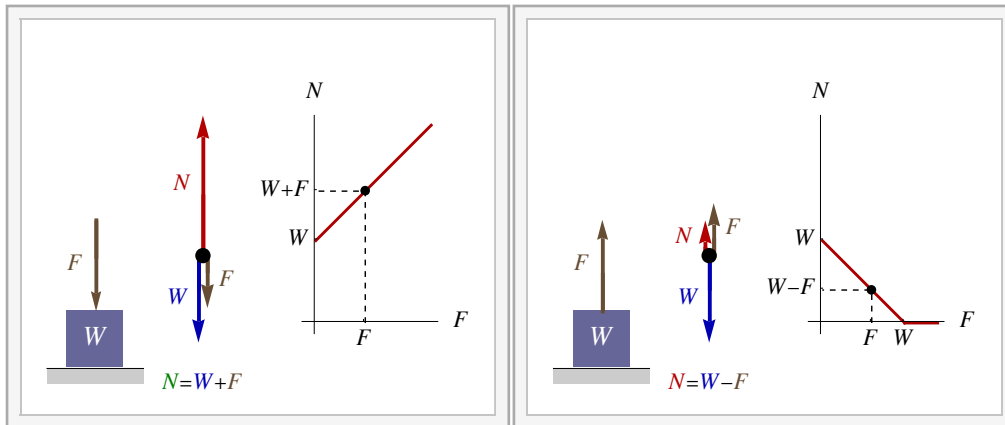

Interactive Figure

Consider a block sitting on a floor as in the interactive figures above. Without an applied force, the normal force is the weight of the book W . If one pushes down on the book with an applied force F , as in the left figure, then the floor pushes up with a larger normal force of $N = W + F$; as F gets larger, N gets larger. If a small force F lifts on the block, as described by the figure on the right, then the normal force $N = W - F$ decreases as F increases. If the lifting force exceeds the weight the normal force the book will lift; N would have to be negative to maintain the inequality. A surface can only push away from it

$$N \geq 0. \tag{D.4}$$

A negative normal force would describe suction or glue.

Because the normal force is a constraint it is *always* found by solving the second law perpendicular to the surface.


$$F_{\text{net}, \perp} = m a_{\perp}$$

One does not just insert a value of N into a problem solution; it is something you calculate using the above expression.

Friction Between Surfaces

Recall that forces from surfaces break up into two components: the perpendicular component is the normal force and the parallel component is friction. There are two types of friction between surfaces, static and kinetic. Static friction is the case when there is no sliding. Kinetic friction is when there is sliding. These are very different things. Static friction is a force of constraint. Kinetic friction is a dissipative force.

Static Friction

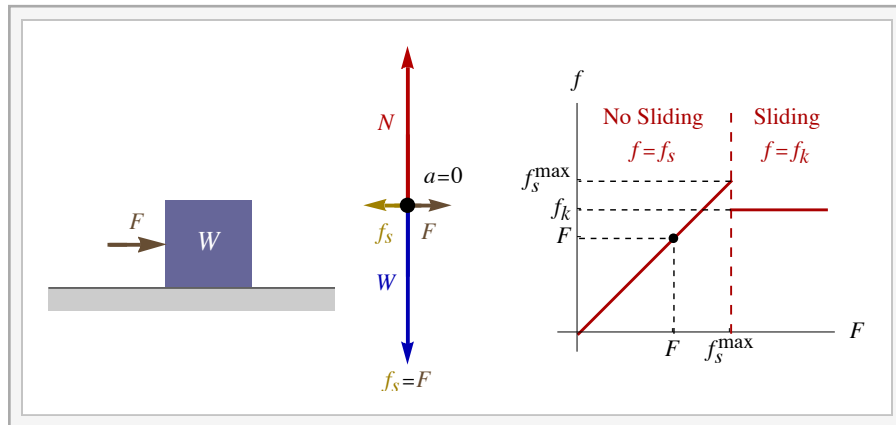

Interactive Figure

The interactive figure above shows a horizontal pushing force F acting on a block of weight W . The force of static friction f_s will keep the block from sliding. It must then act opposite to F and must have the same magnitude, $f_s = F$. As F increases, so does f_s . It should be clear that if F is large enough the block will slide. There is a largest value of the force of static friction f_s^{\max} . When the block slides then there is no longer static friction and we get kinetic friction f_k .

Static friction is a force of constraint; the constraint is that there is no sliding. No sliding implies that the accelerations of the two surfaces are the same. Since it is a constraint we always solve for its value by using

$$F_{\text{net}, \parallel} = m a_{\parallel}.$$

There is an upper limit on static friction. The constraint is that the maximum value is proportional to the normal force.


$$f_s \leq \mu_s N \quad (\text{D.5})$$

μ_s is a dimensionless constant called the coefficient of static friction; it is a property of the two surfaces in contact. At the critical point between sliding and not the inequality is saturated; that is it become equal: $f_s^{\max} = \mu_s N$.

We will demonstrate static friction with two examples: one with no acceleration and another with acceleration.

Example D.3 - Stationary Block on an Incline


To measure the coefficient of static friction between a block and wood plank a student finds the largest angle the plane can have while the block does not slide. If this largest angle is measured to be 28° , then what is the coefficient of static friction between the block and the surface.



Solution

First we draw the free-body diagram. All that is touching the block is the surface, so the surface provides the only contact forces. Perpendicular to the surface is the normal force N . Now that we have friction we also must include the parallel component, which is static friction f_s . To find the direction of the static friction force ask what will happen without it; f_s must

act up the incline to prevent it from sliding down. We break up the weight mg into components as is typical for problems involving inclined planes. The condition that the block is not sliding implies, since the surface is stationary, that the acceleration is zero.



Applying the second law to our pair of perpendicular directions gives expressions for the static friction force and the normal force.

$$F_{\text{net}, \parallel} = m a_{\parallel} \implies m g \sin \theta - f_s = 0 \implies f_s = m g \sin \theta$$

$$F_{\text{net}, \perp} = m a_{\perp} \implies N - m g \cos \theta = 0 \implies N = m g \cos \theta$$

We then use our constraint inequality $f_s \leq \mu_s N$, which is the condition for the block not sliding. We then insert the above values for f_s and N . (Be careful when doing algebra with inequalities; multiplying or dividing by a negative changes the direction of the inequality. Here we are dividing by only positive quantities.)

$$f_s \leq \mu_s N \implies m g \sin \theta \leq \mu_s m g \cos \theta \implies \tan \theta \leq \mu_s$$


At θ_{max} , the largest angle without sliding, we saturate the inequality and get our result.

$$\mu_s = \tan \theta_{\text{max}} = \tan 28^\circ = 0.532$$

Note that the mass was not given but that scaled out of the problem.


Example D.4 - Crate on Flat Accelerating Surface

A truck with a forward acceleration of 2.5 m/s^2 carries a crate inside. If coefficient of static friction between the crate and the floor is 0.30, will the crate slide?

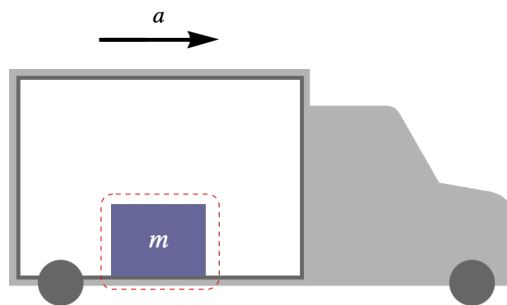

Solution

The only thing touching the crate is the truck's floor; the only contact forces are the two surface forces, the normal force and, assuming no sliding, static friction. The direction of the static friction is forward. Without friction, the crate slides backward and friction prevents that. The only other force to include in our free-body diagram is the weight.



Again, applying the second law to our pair of perpendicular directions gives expressions for the static friction force and the normal force.

$$F_{\text{net}, \parallel} = m a_{\parallel} \implies f_s = m a$$

$$F_{\text{net}, \perp} = m a_{\perp} \implies N - m g = 0 \implies N = m g$$

The constraint inequality $f_s \leq \mu_s N$, is the condition for the block not sliding. Inserting the information above gives the condition.

$$f_s \leq \mu_s N \implies m a \leq \mu_s m g \implies a \leq \mu_s g$$

$$a = 2.5 \text{ m/s}^2, \mu_s = 0.30 \text{ and } g = 9.80 \text{ m/s}^2 \implies 2.5 \stackrel{?}{\leq} 2.94$$

The question mark above the inequality is used because it is a test, not a mathematical statement. Since the test *is* satisfied the crate *will not slide*.

D.7 - Dissipative Friction

When moving with respect to a surface or medium there is a resistive friction force that opposes the relative motion of the object to the surface or medium. If \hat{v} is the unit vector in the direction of the relative velocity of the object (to the surface or medium) then the friction force is opposite that direction.

$$\vec{f} = -f \hat{v}$$

The values of f for different cases will be discussed below.

Kinetic Friction

Kinetic friction is the dissipative force when there is sliding between two surfaces. Its direction opposes the direction of the sliding. The magnitude of the force of kinetic friction is fixed at the value

$$f_k = \mu_k N. \tag{D.6}$$


μ_k is the coefficient of kinetic friction. Like the static friction case, it is a property of the two surfaces.

Example D.5 - Block Sliding on an Incline

A block is pushed and released at the bottom of an incline at angle θ . It slides up the incline, stops for an instant and then slides down the incline. The coefficient of kinetic friction between the block and the incline is μ_k .

(a) When sliding up the incline what is its acceleration? Take an acceleration down the incline to be a positive a .

Solution

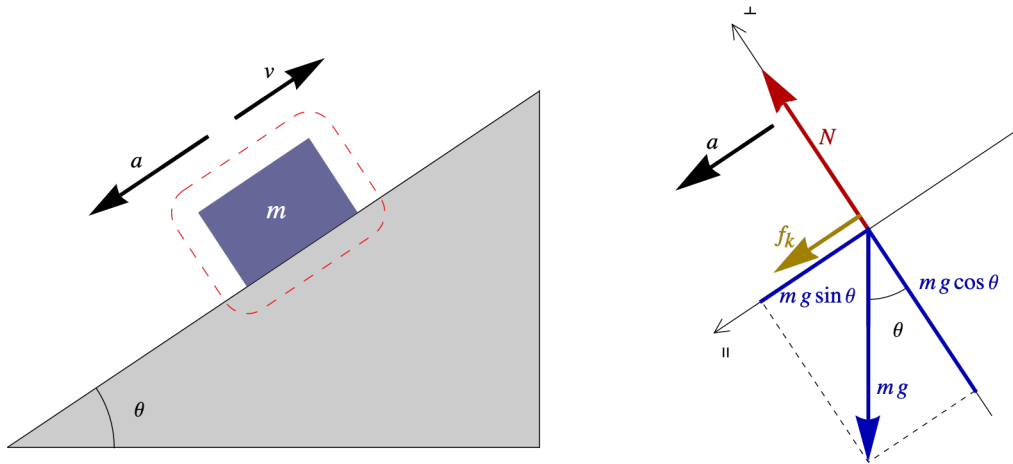

Applying the second law the direction perpendicular to the surface gives the normal force.

$$F_{\text{net}, \perp} = m a_{\perp} \implies N - m g \cos \theta = 0 \implies N = m g \cos \theta$$

The parallel component equation of the second law gives an expression for a .


$$F_{\text{net}, \parallel} = m a_{\parallel} \implies m g \sin \theta + f_k = m a$$

We then use our expression for kinetic friction (D.6) $f_k = \mu_k N$. Combining this with our expression for N gives $f_k = \mu_k m g \cos \theta$. We can then solve for a by dividing out the mass.

$$m g \sin \theta + \mu_k m g \cos \theta = m a \implies a = g \sin \theta + \mu_k g \cos \theta$$

(b) When sliding down the incline what is its acceleration? Take an acceleration down the incline to be a positive a .

Solution

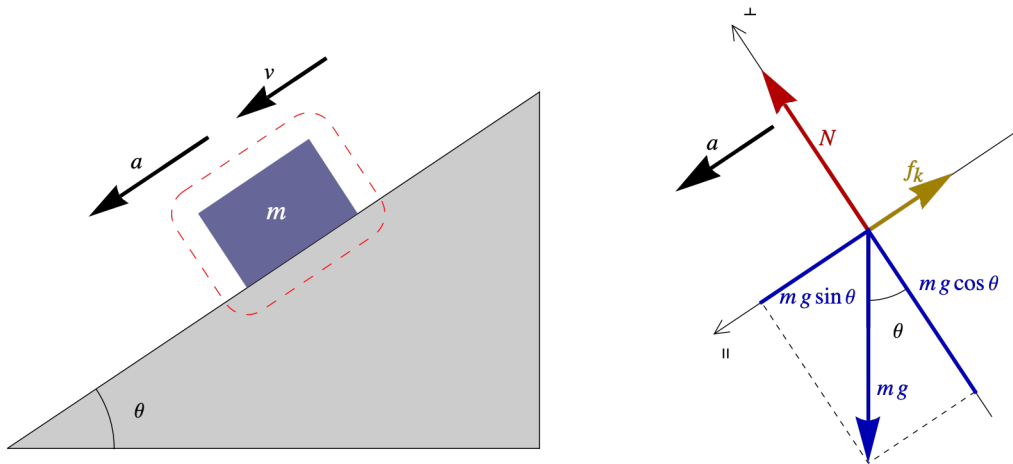

This part is identical to the case above except the kinetic friction is now up the incline and thus comes in with the opposite sign.

$$F_{\text{net}, \perp} = m a_{\perp} \implies N - m g \cos \theta = 0 \implies N = m g \cos \theta$$

$$F_{\text{net}, \parallel} = m a_{\parallel} \implies m g \sin \theta - f_k = m a$$

Since the normal force is the same as before, the kinetic friction force is the same. This gives:

$$a = g \sin \theta - \mu_k g \cos \theta$$

Friction in a Medium

When an object moves through a fluid, a liquid or a gas, it experiences a friction force with a magnitude that varies with the speed. This is in contrast to kinetic friction which has a fixed magnitude independent of the speed. There are two simple ways to model friction in a medium: viscous friction, which is proportional to the speed and quadratic drag, which is proportional to the speed squared.

Viscous Friction

Typically, at low speeds when the fluid flow around the object is laminar (smooth) the friction behaves as viscous friction.

$$f = b v$$

v is the speed and the constant b depends on the viscosity of the fluid and the geometry and surface texture of the object.

Quadratic Drag

At speeds higher than where the fluid flow around the object becomes turbulent the friction force becomes quadratic drag.

$$f = c v^2$$

The constant c depends on the viscosity of the fluid and the geometry and surface texture of the object.